


ICC series card cages



The ICC19001, ICC19101, ICC19201 and ICC19301 card cages are designed to provide rugged housing for the 8-bit Micro PC compatible cards in one case.

FC ribbon cables

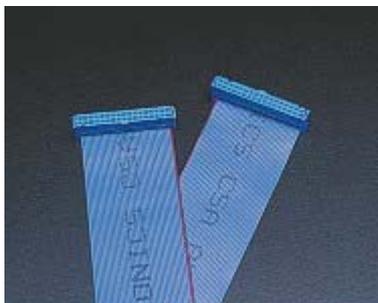

The FC cables are used to connect control and expansion cards to external I/O peripherals. There is an IDC connector on both ends of each cable. The first number following "FC" is the number of conductors, and the second number is the length in centimeters.

The FCD (VCD) serial cables are compatible with all standard serial ports. The FCD-9F has a female DB-9 connector and FCD-9M has a male DB-9 connector. Both have a 10-pin IDC connector on the other end to interface with cards.

FC62 flexible backplanes



The FC62-2 (MK20) and FC62-3 (MK-30) flex backplanes can stack two or three computer cards together. These flexible backplanes are ideal in limited space applications. Moreover, they ease service operations.

ORDERING INFORMATION

ICC19001

4-slot, rear mount card cage

ICC19101

8-slot, rear mount card cage

ICC19201

12-slot, rear mount card cage

ICC19301

3-slot, table mount card cage

ACS00000 FC10-60, ribbon cable,
10 threads, IDC connector, 0.6 m (2 ft)

ACS00001 FC20-60, ribbon cable,
20 threads, IDC connector, 0.6 m (2 ft)

ACS00002 FC26-60, ribbon cable,
26 threads, IDC connector, 0.6 m (2 ft)

ACS00003 FC34-60, ribbon cable,
34 threads, IDC connector, 0.6 m (2 ft)

ACS00004 FC40-60, ribbon cable,
40 threads, IDC connector, 0.6 m (2 ft)

ACS00005 FCD9M, ribbon serial cable,
male, 1.8 m (6 ft)

ACS00006 FCD9F, ribbon serial cable,
female, 1.8 m (6 ft)

ACS00010 FC44, ribbon cable,
44 threads, 1 mm pitch,
IDE connectors, 0.3 m (1 ft)

ACS00011 FCD25F, ribbon cable,
25 threads, LPT, 0.6 m (2 ft)

ACS00012 FCDH15F, ribbon cable,
25 threads, LPT, 0.6 m (2 ft)

ACS00013 FC14-60, ribbon cable,
14 threads, IDC connector, 0.6 m (2 ft)

ACS00014 FC16-60, ribbon cable,
16 threads, IDC connector, 0.6 m (2 ft)

ACS00015 FC60-30, ribbon cable,
60 threads, 0.63 mm pitch, 0.3 m (1 ft)

ACS00016 FC72-30, ribbon cable,
72 threads, 0.63 mm pitch, 0.3 m (1 ft)

ACS00007

FC62-2, flexible backplane, 2 headers

ACS00008

FC62-3, flexible backplane, 3 headers